

(2) Mode: Long press mode switch hole for 3 seconds to switch the temperature measurement mode (Sur: surface mode, bod: object mode, Cou: counting mode)



Fig. 11





Fig. 12




Fig. 13

3. Install and replace battery


- (1) Remove three screws
- (2) Open the back base and install 18650 Li battery




4. Install method



1. Nail hook



2. Bracket fixing




3. Double-sided adhesive sticking

5. Warnings

1. It is the user's responsibility to ensure the electromagnetic compatibility environment of the device so that the device can work normally.
2. It is recommended to evaluate the electromagnetic environment before using the device.
3. When changing the operating environment, the device must be left to stand for more than 30 minutes.
4. Please measure the forehead to the thermometer.
5. It is not recommended to use it outdoors or under strong light.
6. Keep away from air conditioners, fans, etc.
7. Please use qualified, safety-certified batteries, unqualified batteries or non-rechargeable batteries used may cause fire or explosion.
8. If it cannot work after install the battery, please insert the charging cable to charge it and it can be used normally.




Infrared Thermometer User Guide

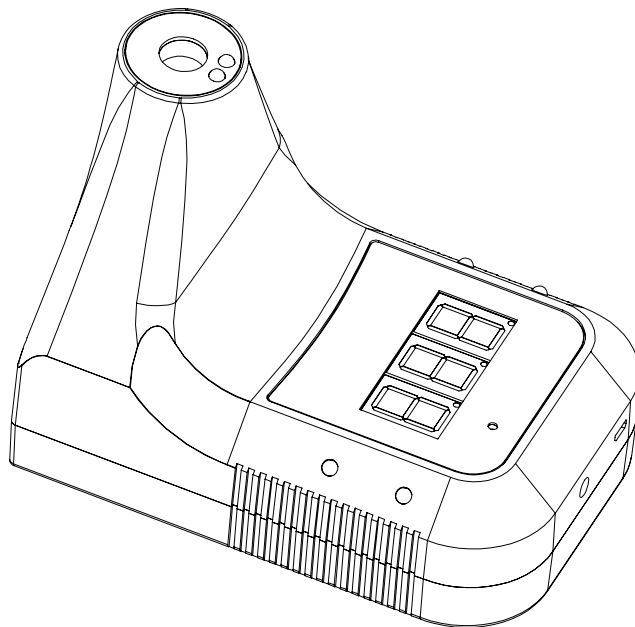


Model: K3


1. Introduction



Tripod mounting hole USB interface



Switch

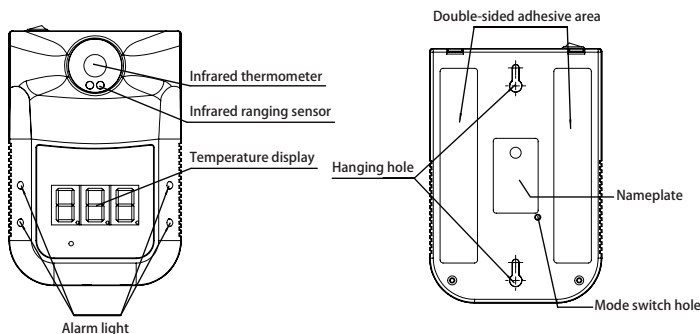

2. Specification

1. Accuracy: ± 0.2 degrees (34~45 C, place it in the operating environment for 30 minutes before use)
2. Abnormal automatic alarm: flashing + "Di Di" sound
3. Automatic measurement: measuring distance 5cm ~ 10cm
4. Screen: Digital display
5. Charging method: USB charging or battery (18650 Li-ion).
6. Install method: nail hook, double-sided adhesive sticking, bracket fixing
7. Environment temperature: 10 C~40 C (Recommended 15 C~35 C)
8. Infrared measuring range: 0~50 C
9. Response time: 0.5s
10. Input: DC 5V
11. Weight: 350g
12. Dimensions: 170*115*140mm
13. Standby: About one week
14. Counting capacity: 999

3. Status Description

1. Standby: The red dot in the bottom of the display lights up in turn. (Fig. 1)
2. Insufficient power: The horizontal bar lights up in the middle of the display. (Fig. 2)
3. Normal temperature: Flashing green lights and alarm 'Di'. (Fig. 3)



Fig. 1



Fig. 2



Fig. 3

4. Abnormal temperature: Flashing red lights and alarm 'Di Di'. (Fig. 4)



Fig. 4



Fig. 5



Fig. 6

5. Default (bod:object mode) :

'Lo': Ultra-low temperature alarm. (Fig.5)
'Hi': Ultra-high temperature alarm.(Fig.6)

4. Operation Instruction

1. Temperature measurement: Front of the thermometer and approach it within 5-10 cm. (Fig. 7)





Fig. 7

2. Mode switching: There is a small hole on the back of the device (Fig. 8). You can use a 3mm diameter screwdriver to insert the hole and then press the button.

- (1) Temperature unit: Press 'mode switch hole' then select 'C' or 'F' (Fig.9, 10) C: Celsius F: Fahrenheit



Fig. 8



Fig. 9



Fig. 10



GGM Gastro International GmbH
Weinerpark 16
D-48607 Ochtrup

www.ggmgastro.com info@ggmgastro.com
+49 2553 7220 0