




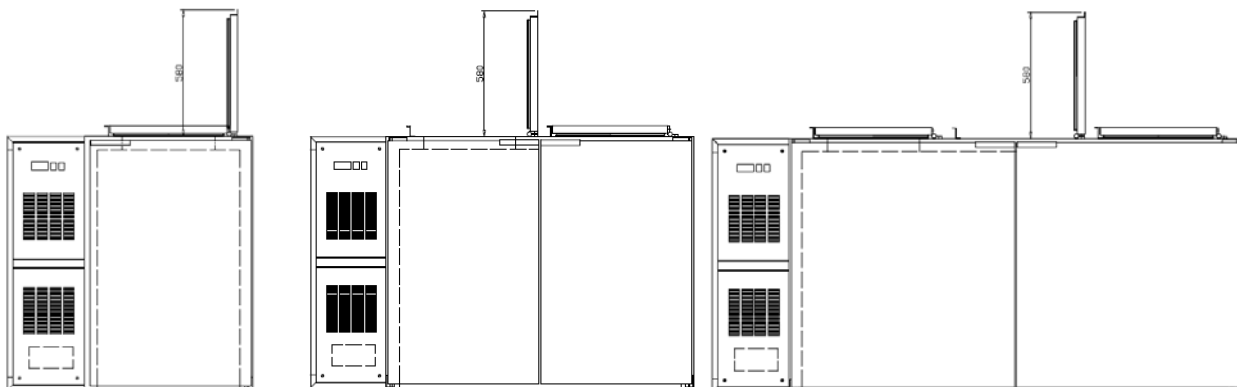
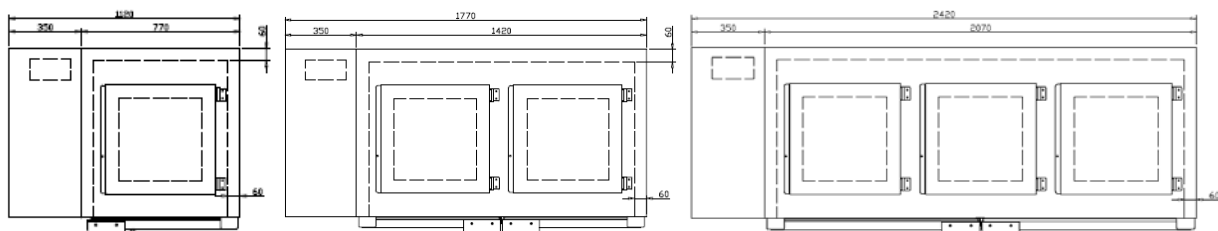
Gegenstand	<b>Nass-Abfallkühler</b>	
Modelle	<b>NKT</b>	
Betriebstemperaturbereich	<b>+2 / +12°C</b>	






	Modelle	Aussenmasse BxTxH (mm)	Innenmasse BxTxH (mm)	Kapazität (lt)	Temp- Bereich (°C)	Kälte- Mittel	Kälte- Leist (W)	Anschluss (V/Hz)	Aufnahme- Leistung (W)	Brutto Gewicht (Kg)	Verpackt (m3)
	NKT119R/L	1120x880x1210	650x760x1100	1x120/240	+2/+12	R134a	280	230/1/50	380	114	1,6
	NKT189R/L	1770x880x1210	1300x760x1100	2x120/240	+2/+12	R134a	338	230/1/50	423	159	2,5
	NKT249R/L	2420x880x1210	1950x760x1100	3x120/240	+2/+12	R134a	449	230/1/50	535	196	3,3

\* VT: -10°C

Kond: +55°C



-  Elektro-Anschluss
-  Kältemittel-Anschluss
-  Typenschild