

KF1812#WKAF5N (1800x1200x2010)--80mm MATERIAL AND TECHNICAL CHARACTERISTICS

INDEX :

- 1. CHARACTERISTICS**
- 2. INSIDE , OUTSIDE DIMENSIONS**
- 3 ASSEMBLY**

KF1812#WKAF5N (1800x1200x2010)--80mm





KF1812#WKAF5N SPECIALITIES

- **80mm panel thickness
- **42kg/m³ density polyurethane insulation.
- **Panels consist of the 304 quality stainless steel.
- **Room height 2010 mm
- **Modular panels - easily assembled and separated.
- **Two-side locking system , female-male perfect combination.
- **Winding lock system.
- **Installation without any bolt or silicone.
- **1mm thickness embossed stainless steel special floor panels.
- **Door with gasket and heater easy , perfect door closure.
- **Security door handle inside the room
- **+43C degree ambient working temperatures.
- **HACCP appropriate cleaning PVC profiles provide a hygienic environment.
- **Proper cooling units with the capacity of the room.

Extra options as transparent air curtain, plastic shelf options.


Outside Dimensions	:1800x1200x2010mm
Inside Dimensions	:1640x1040x1850mm
Package Dimensions	:2000x1350x1200mm
Net door passage Dimensions	:700x1845mm
Inside Volume	: 3,15 m ³
Gross Weight	: 220 kg
Net Weight	: 240 kg
Inside-Outside Body	: 0,50 mm 304 stainless steel
Insulation Material	: Polyurethane
Insulation Material Thickness	: 80 mm
Insulation Material Volume	: 42 Kg / m ³ +/-1

Certifications	: TS 2225 EN 60335-2-4'
Ambalaj / Packing	: Wooden Palet Is Down And Covered

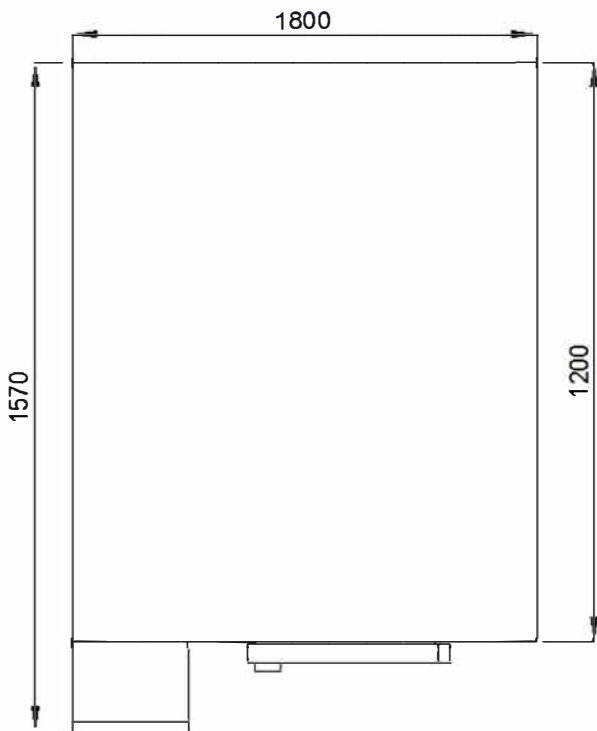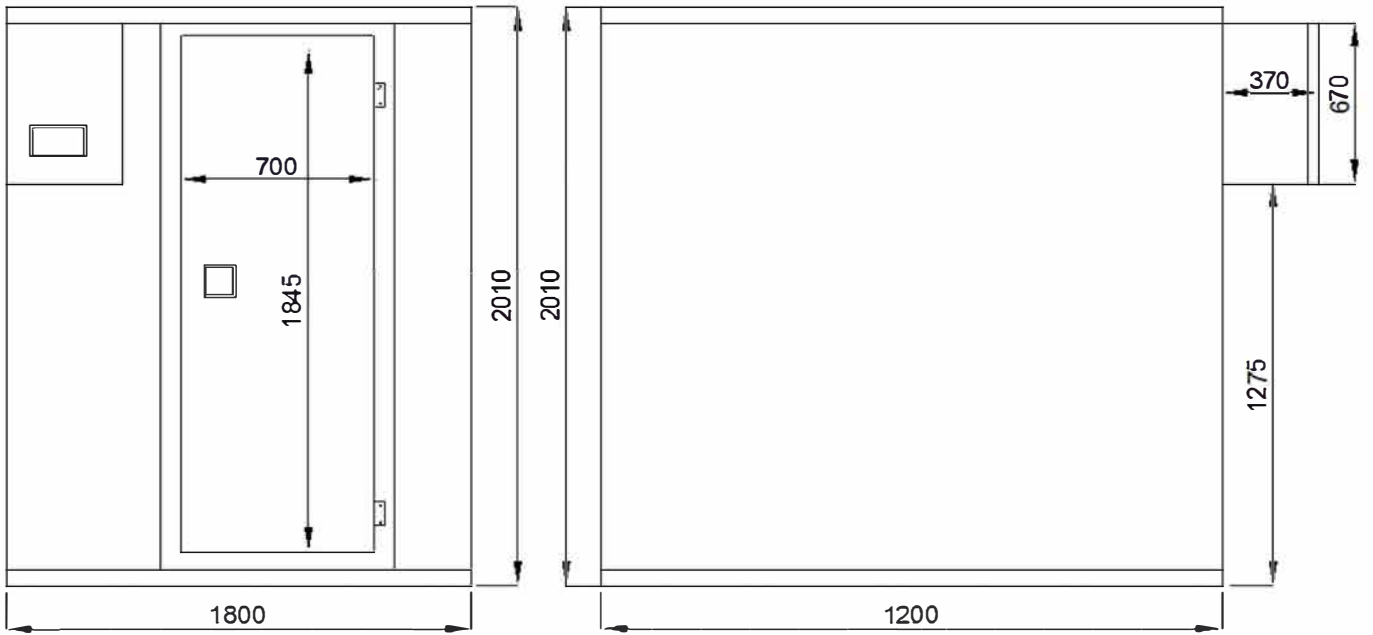

OUTSIDE DIMENSIONS = 1800x1200x2010
 IN SIDE DIMENSIONS = 1640x1040x1850
 NET DOOR PASSAGE DIMENSIONS = 1845x700

	(1800x1200x2010)					
--	------------------	--	--	--	--	--

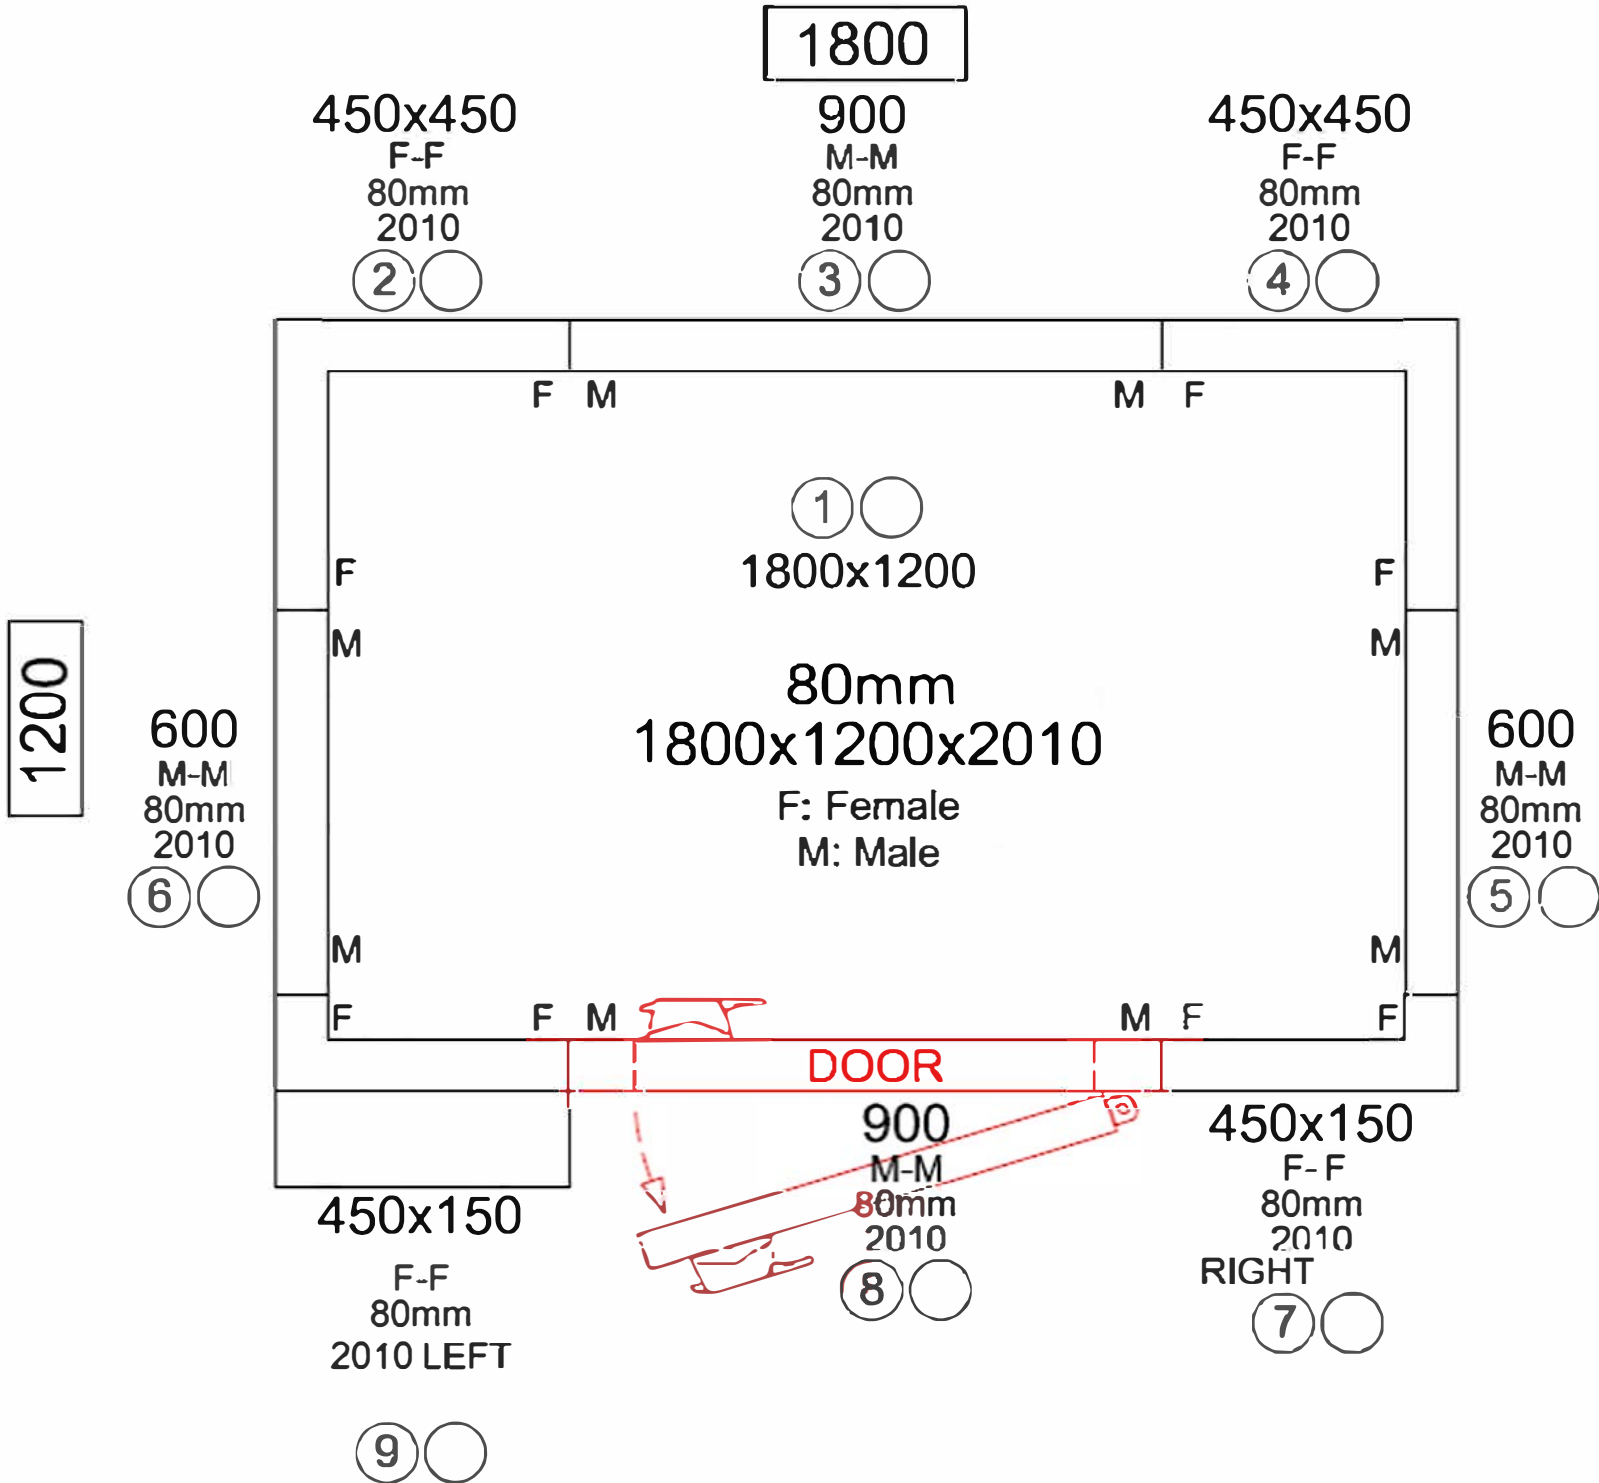

Modular Cold Rooms

Easy Assembly

