


Luftdichte (γ): 1.20 kg/m³
Installation type "B": free inlet, ducted outlet
12000 m³/h fan test chamber according to AMCA 210/05 fig. 12

Lüfertyp:	DAIN 12/12 XPL	Motor code:	201100P	Motor T.H.:	YES OUT
Test Nr.:	1008	Motor power [W]:	1100	Capacitor [μ F]:	-
Datum:	2014/12/18	Motor poles:	6	Fan max. abs. current [A]:	8,7/5
Spannung:	230/400 3~	Mot. prot. class:	IP55		
Frequenz:	50	Mot. ins. class:	F		

Fan ErP status: ErP 2015


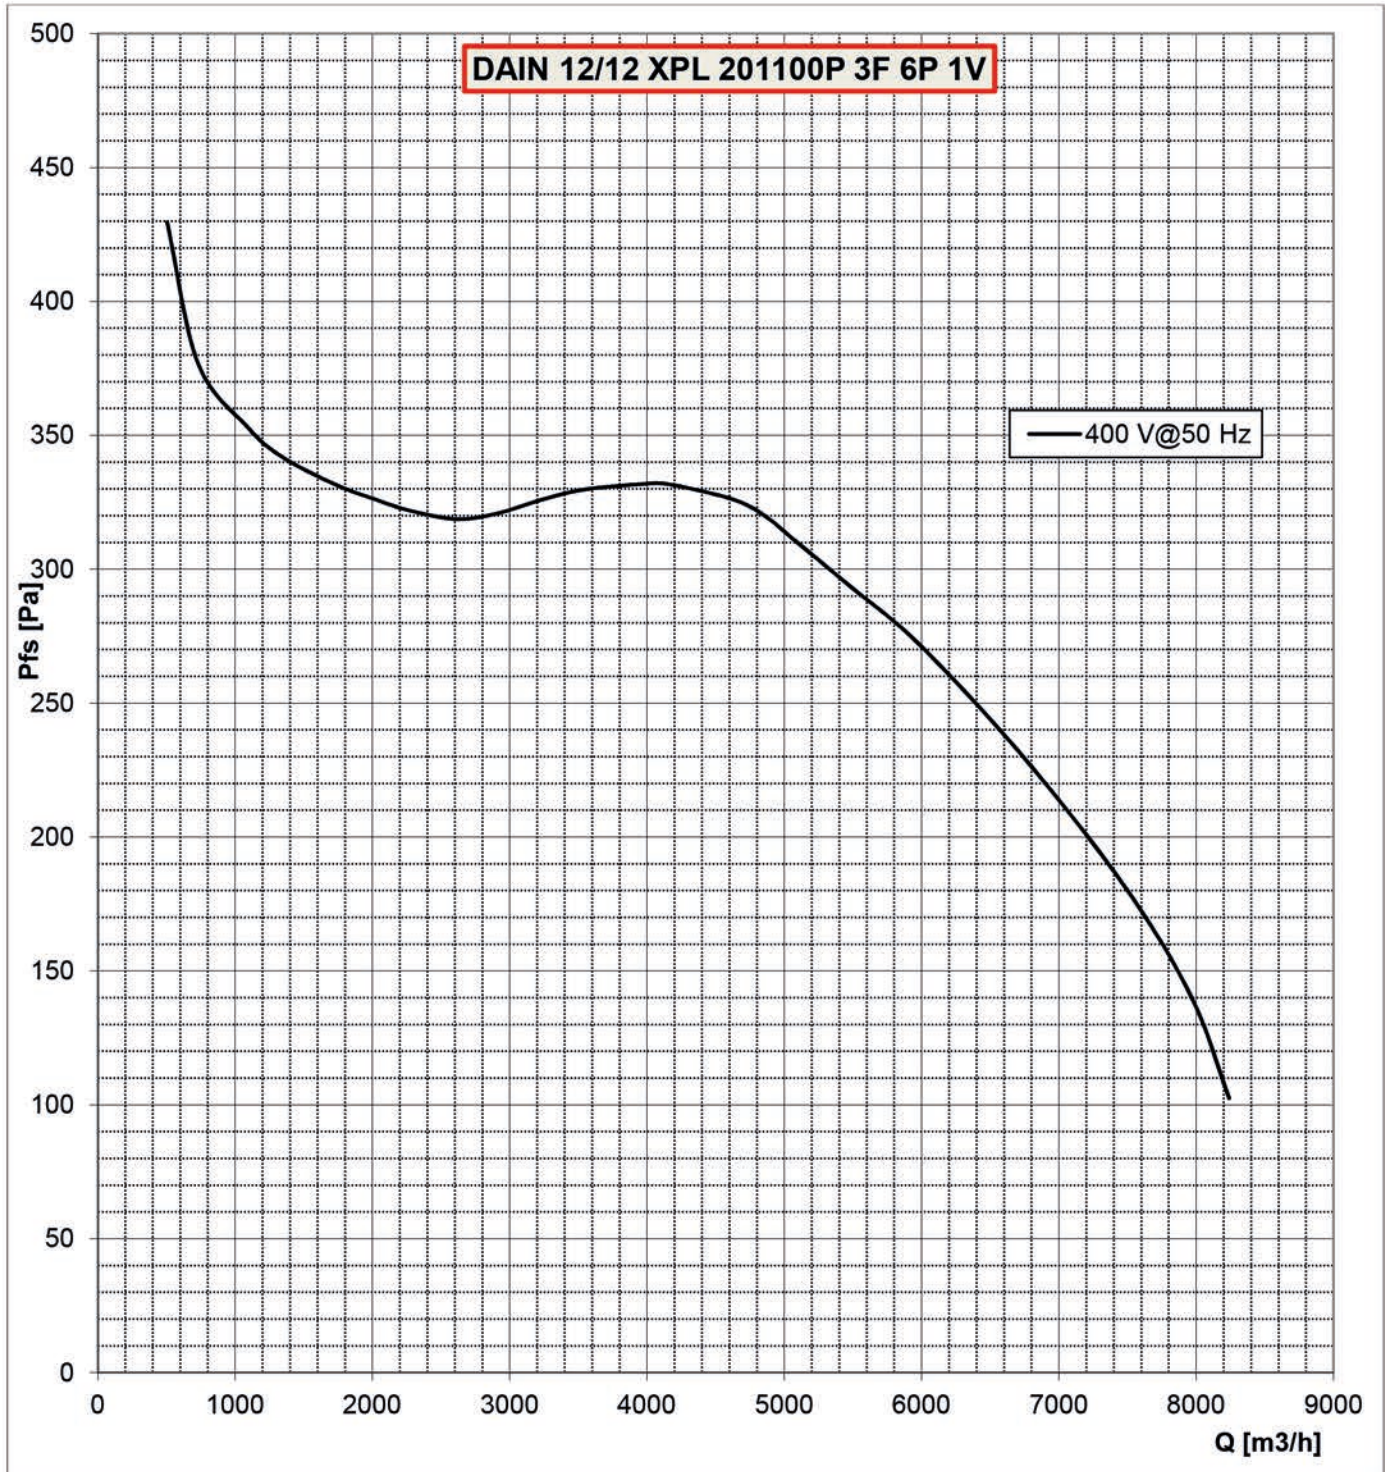


Daten sind nicht durch AMCA zertifiziert.

Luftdichte (γ): 1.20 kg/m³
 Installation type "B": free inlet, ducted outlet
 12000 m³/h fan test chamber according to AMCA 210/05 fig. 12

Lüfertyp:	DAIN 12/12 XPL	Motor code:	201100P	Motor T.H.:	YES OUT
Test Nr.:	1008	Motor power [W]:	1100	Capacitor [μF]:	-
Datum:	2014/12/18	Motor poles:	6	Fan max. abs. current [A]:	8,7/5
Spannung:	230/400 3~	Mot. prot. class:	IP55		
Frequenz:	50	Mot. ins. class:	F		

Fan ErP status: ErP 2015

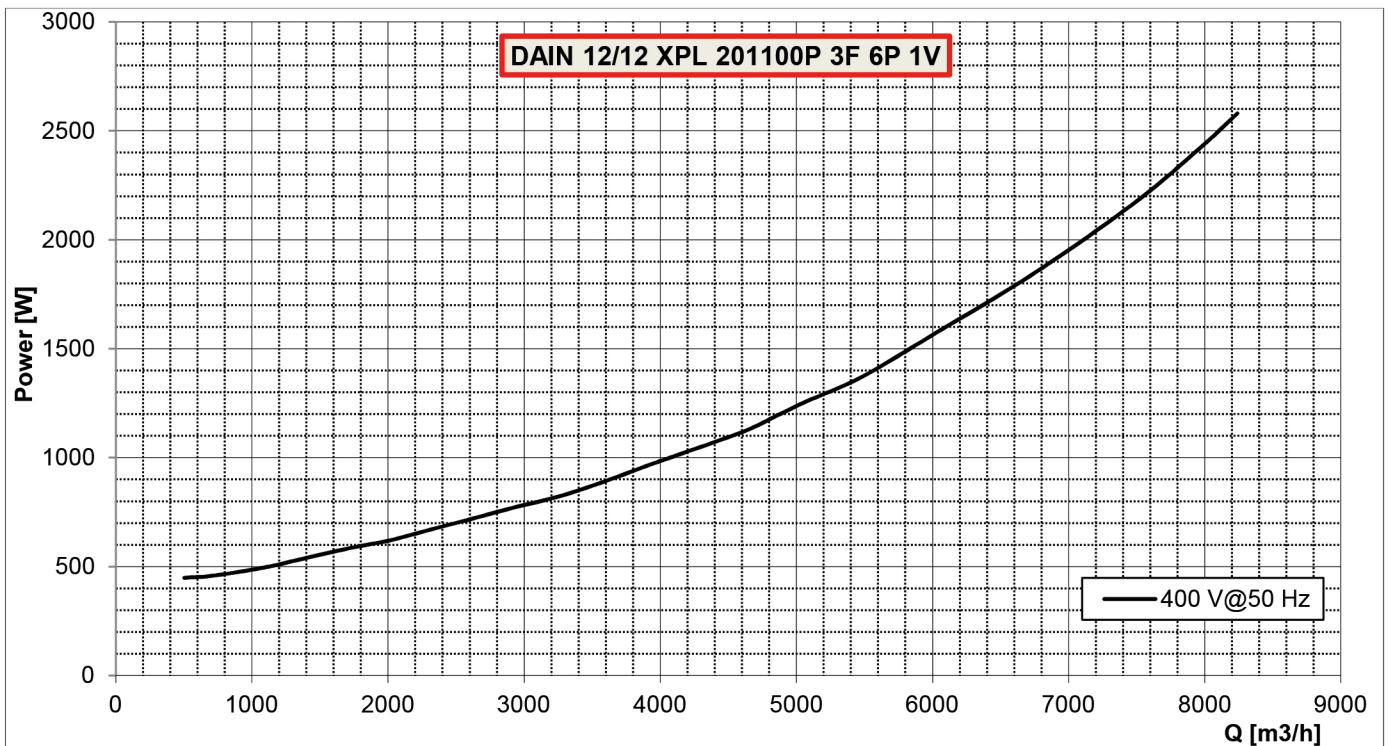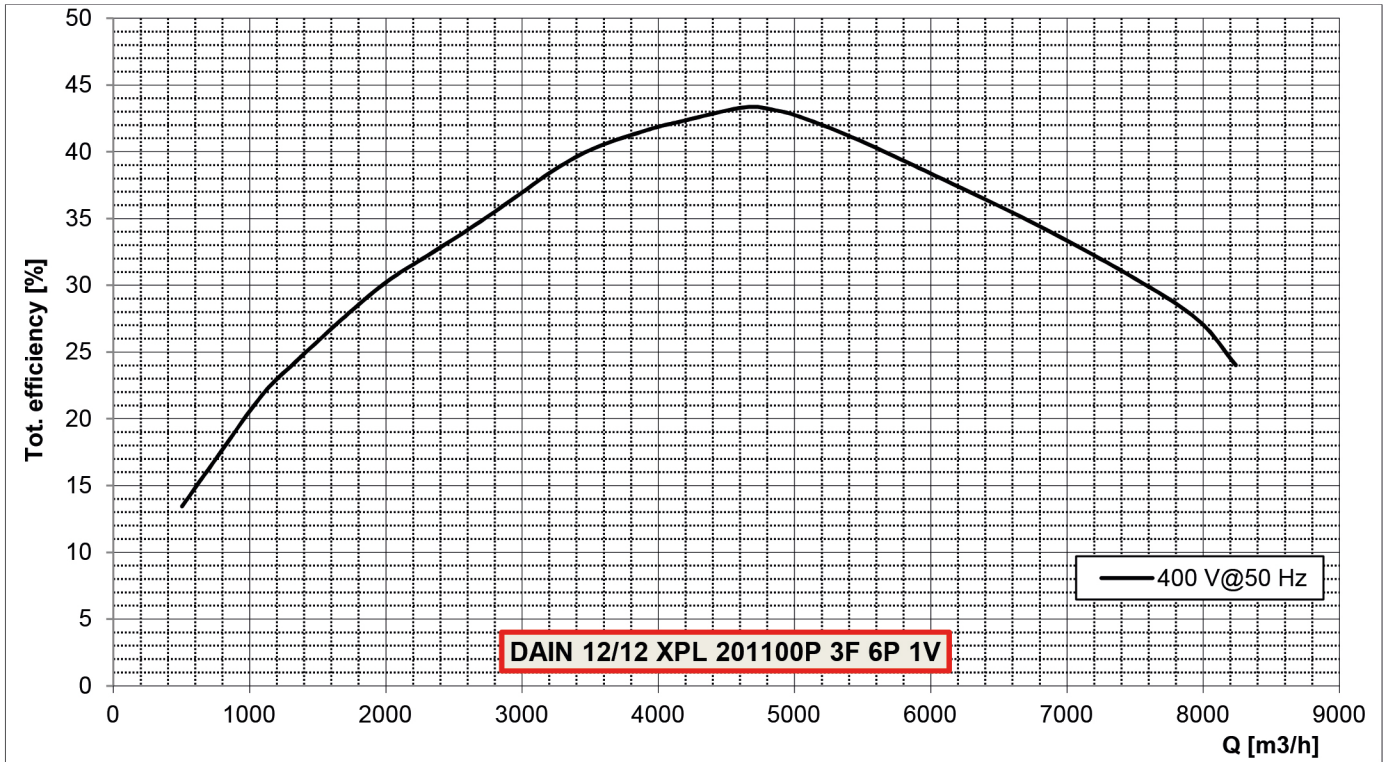

Luftdichte (γ): 1.20 kg/m³
 Installation type "B": free inlet, ducted outlet
 12000 m³/h fan test chamber according to AMCA 210/05 fig. 12

Lüftertyp:	DAIN 12/12 XPL	Motor code:	201100P	Motor T.H.:	YES OUT
Test Nr.:	1008	Motor power [W]:	1100	Capacitor [μF]:	-
Datum:	2014/12/18	Motor poles:	6	Fan max. abs. current [A]:	8,7/5
Spannung:	230/400 3~	Mot. prot. class:	IP55		
Frequenz:	50	Mot. ins. class:	F		

Fan ErP status: ErP 2015

