
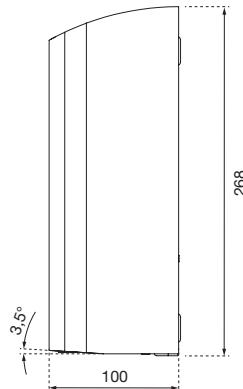


HAND DRYER

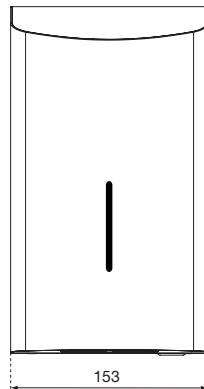

TECHNICAL DATA

Effective air capacity	60 - 74 m ³ /h
Air velocity	342 - 414 km/h
Air temperature	55 °C (100 mm after air outlet, at 25 °C room temperature)
Motor power	325 - 500 W (adjustable)
Heatingelementpower	90 - 300 W (adjustable)
Overall performance	415 - 800 W (adjustable)
Amperage	2,35 - 3,3 A
Voltage	220 - 240 V
Frequency	50/60 Hz
Operatingnoise	74 dB +/- 3 dB @ 1 m
Motor revolutions per minute	22.000 - 29.000
Motor type	Universal motor
Base plate	Steel, galvanized
Sensorsetting	100 mm to 230 mm adjustable; standard 170 mm ± 20 mm
Protection class	Protection class I
IP protection class	IP 24
Motor fuse	Thermal fuse 95 degrees
Heatingelementfuse	Thermal fuse 85 degrees

DESCRIPTION TEXT

Warm-air hand dryer C 86, particularly suitable for semi-public laundry rooms with high user frequency, automatic operation via infrared sensor, adjustable sensor range, 100 to 230 mm, standard 170 mm \pm 20 mm, running time up to approx. 1 second after hands are removed, maximum 60 seconds after switching on, housing material 1.2 mm stainless steel, brushed stainless steel housing surface, air speed 342-414 kmh (adjustable), air temperature 55° Celsius (100 mm after air outlet, at 25° Celsius room temperature), hand drying time approx. 10-15 seconds, motor power 325-500 watts (adjustable), heating element power 90-300 watts (adjustable), total power 415-800 watts (adjustable), current 2.35-3.3 A, voltage 220 to 240 volts, frequency 50/60 Hz, operating noise 71-77 dB (adjustable), motor revolutions, 22000-29.000

revolutions per minute (adjustable), motor type universal motor, protection class I, protection rating IP 24, mounting with 4-point screw connection, concealed power connection to flush-mounted box or with flexible cable (included, length 1.1 m), weight 3.3 kilograms, test marks CE, GS, EMV, LVD, RoHS, UL, for surface mounting.

DIMENSIONS

H x W x D 268 x 153 x 100 mm
Weight 3,30 kg

AREAS OF APPLICATION

Can be used in public areas with moderate visitor frequency and risk of vandalism: restaurants, schools, universities, municipal buildings, doctors' surgeries, kindergartens, nursing homes, stores, law firms, offices, theaters, cinemas, hotels, spas, stores, staff toilets, fitness studios, etc.

INSTALLATION TIP

Recommended installation heights for AIR-WOLF C series hand dryers from the floor to the bottom edge of the appliance:



ALTERNATIVE SURFACE DESIGN

HTWAW8,
White coated stainless steel

HTSAW8
Black coated stainless steel

