

KF1821#WKAF75N (1800x2100x2010)--80mm MATERIAL AND TECHNICAL CHARACTERISTICS

INDEX :

- 1. CHARACTERISTICS**
- 2. INSIDE , OUTSIDE DIMENSIONS**
- 3 ASSEMBLY**

KF1821#WKAF75N(1800x2100x2010)--80mm





KF1821#WKAF75N SPECIALITIES

- **80mm panel thickness
- **42kg/m³ density polyurethane insulation.
- **Panels consist of the 304 quality stainless steel.
- **Room height 2010 mm
- **Modular panels - easily assembled and separated.
- **Two-side locking system , female-male perfect combination.
- **Winding lock system.
- **Installation without any bolt or silicone.
- **1mm thickness embossed stainless steel special floor panels.
- **Door with gasket and heater easy , perfect door closure.
- **Security door handle inside the room
- **43C degree ambient working temperatures.
- **HACCP appropriate cleaning PVC profiles provide a hygienic environment.
- **Proper cooling units with the capacity of the room.

Extra options as transparent air curtain, plastic shelf options.

Outside Dimensions	:1800x2100x2010mm
Inside Dimensions	:1640x1940x1850mm
Package Dimensions	:2000x1350x1200mm
Net door passage Dimensions	:700x1845mm
Inside Volume	: 5,88 m ³
Gross Weight	: 315 kg
Net Weight	: 335 kg
Inside-Outside Body	: 0,50 mm 304 SB stainless steel
Insulation Material	: Polyurethane
Insulation Material Thickness	: 80 mm
Insulation Material Volume	: 42 Kg / m ³ +/-1
Onaylar / Certifications	: TS 2225 EN 60335-2-4'
Ambalaj / Packing	: Wooden Palet Is Down And Covered

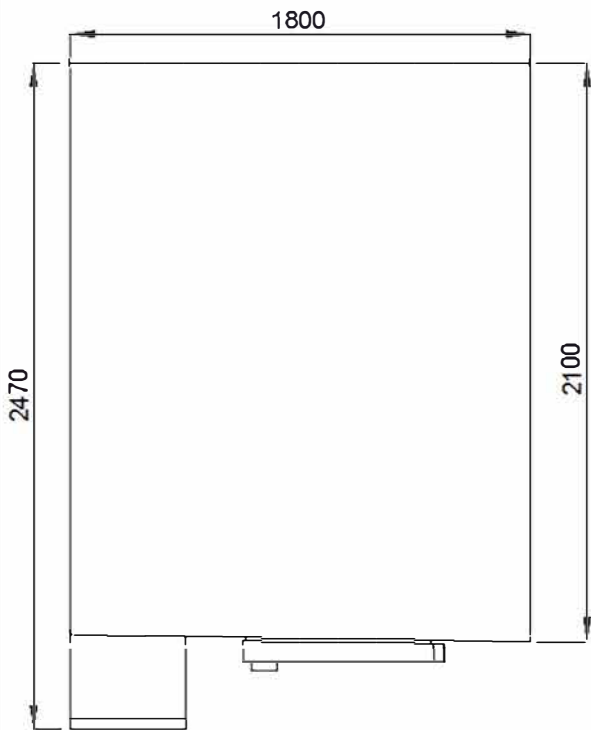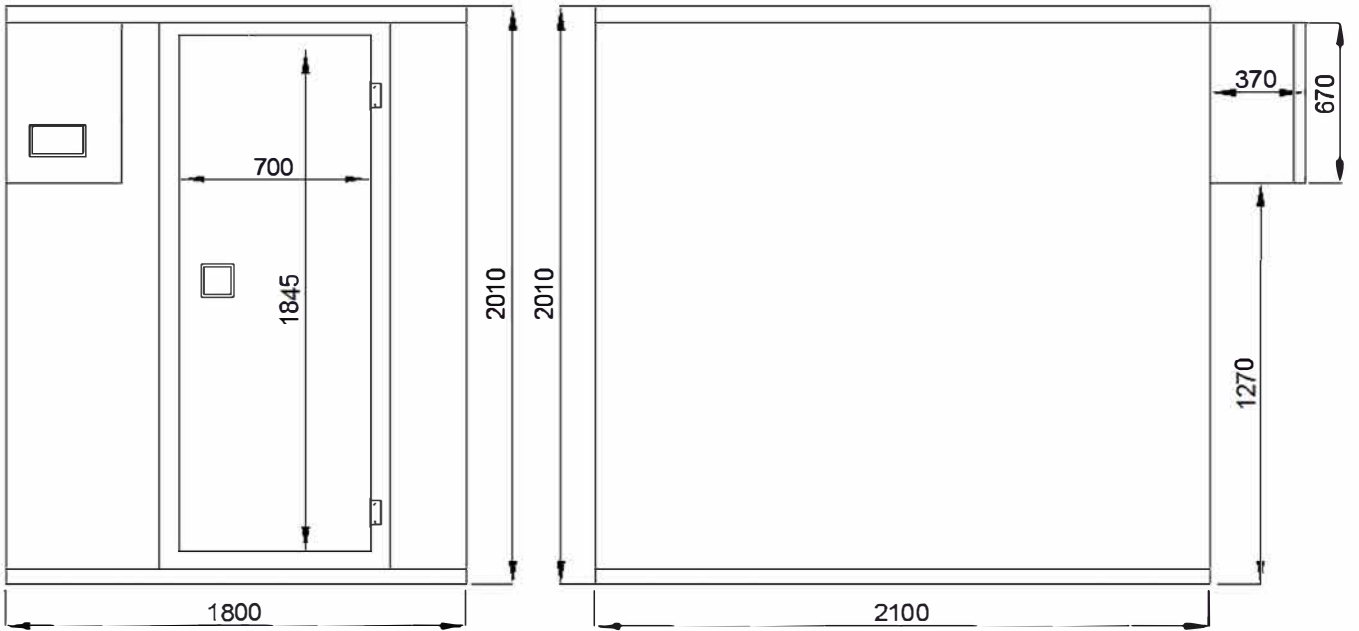

OUTSIDE DIMENSIONS = 1800x2100x2010
 IN SIDE DIMENSIONS = 1640x1940x1850
 NET DOOR PASSAGE DIMENSIONS = 1845x700

	(1800x2100x2010)						
--	------------------	--	--	--	--	--	--

1800

450x450

F-F
80mm
2010



900

M-M
80mm
2010



450x450

F-F
80mm
2010



F M

M F

F
M



1800x1050
Male

F
M

900
M-M
80mm
2010



CR1821201--80mm
1800x2100x2010

F: Female
M: Male

900
M-M
80mm
2010



2100

600
M-F
30mm
2010



1800x1050
Female

300
F-M
80mm
2010



M
F

M
F

M
F

M
F

F M

M F

DOOR

600x150

F-F
80mm
2010
LEFT



900

M-M
80mm
2010



450x300

F-F
80mm
2010
LEFT



Modular Cold Rooms

Easy Assembly

